



AKAA Trading LLC
Tents & Parking Shades



Aluminium Tents



U.A.E Office

Contact: 00971506975093, 00971-5672001, 00971-65540401
Al Khayam Al Arabia Tents & Parking Shades LLC
Sharjah Al Soor Ibrahim Mohammad Al Madifa Street

Pakistan Office

Contact: 042-35786715, 0323-8888819
E-mail: empiremarquee@live.com
Address: Office # 1113, Floor 11, Eden Heights, Jail Road Lahore.



AKAA Trading LLC

Tents & Parking Shades



Party Tent:

A-Shape Structure

a). Aluminium profile : 85*48*3mm

Frame Specifications:

- 1) Span Width: 9.00m
- 2) Eave Height: 2.70m, 3.00m, 3.50m
- 3) Ridge Height: 4.40m, 4.70m, 5.20m
- 4) Roof Pitch: 20°
- 5) Bay spacing: 3.00m
- 6) Longest Component: 4.72m
- 7) Max. wind loading: 80km/h

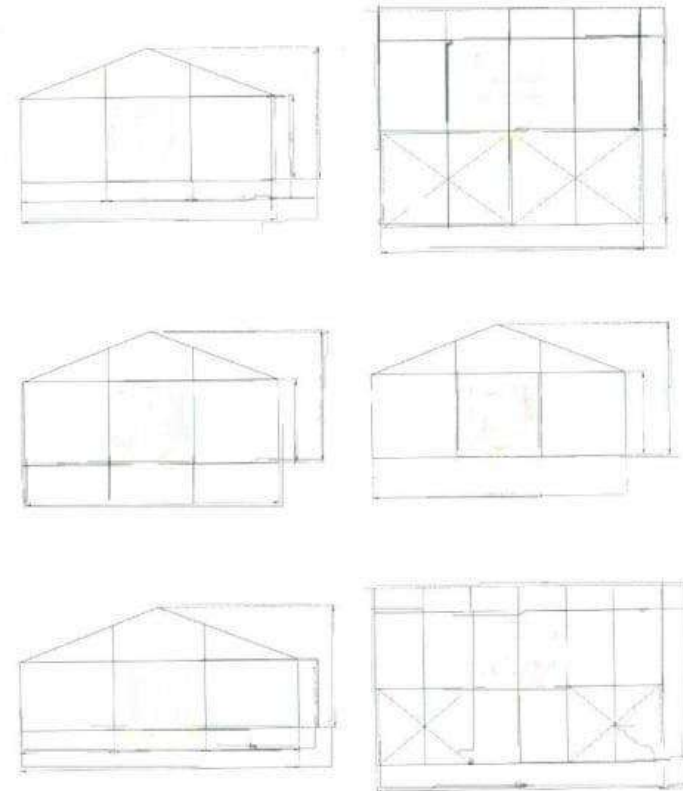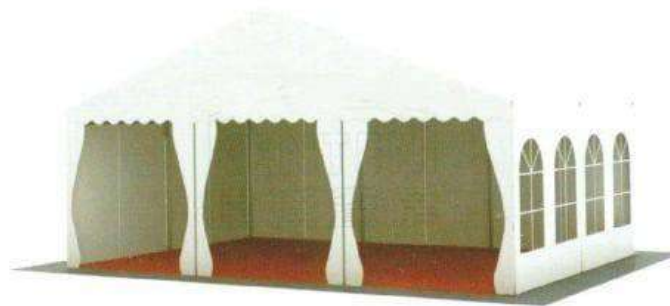

Frame Specifications:

- 1) Span Width: 10.00m
- 2) Eave Height: 2.70m/3.00m/3.50m
- 3) Ridge Height: 4.60m, 4.90m, 5.40m
- 4) Roof Pitch: 20°
- 5) Bay spacing: 3.00m
- 6) Longest Component: 5.28m
- 7) Max. wind loading: 80km/h

Frame Specifications:

- 1) Span Width: 12.00m
- 2) Eave Height: 2.70m/3.00m/3.50m
- 3) Ridge Height: 5.00m/5.30m/5.80m
- 4) Roof Pitch: 20°
- 5) Bay spacing: 3.00m
- 6) Longest Component: 6.305m
- 7) Max. wind loading: 80km/h

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005, 6061/T6)
- 2) Main Profile:
85 x48x3mm,
- 3) Eave connection:
Hot-dip galvanized steel insert.

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2, NFPA701
- 3) Weight of roof cover: 800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

- | | |
|----------------------------|-------------------------|
| PVC Window Side walls, | Transparent PVC Cover |
| Lining & Curtain, | and Side Wall Cover, |
| Glass Door Units, | Floor System, Lighting, |
| Glass Wall System, | Weight Plate, Anchor |
| ABS Solid Wall System, | |
| Transparent PC Solid Wall, | |



AKAA Trading LLC
Tents & Parking Shades



Peach Structure Tent:

Peach Structure Series

a). Aluminium profile : 201*111*5/4mm

Frame Specifications:

- 1) Span Width: 20.00m
- 2) Ridge Height: 9.40m
- 3) Roof Pitch: 25°
- 4) Bay spacing: 5.00m
- 5) Longest Component: 7.39m
- 6) Max. wind loading: 105km/h

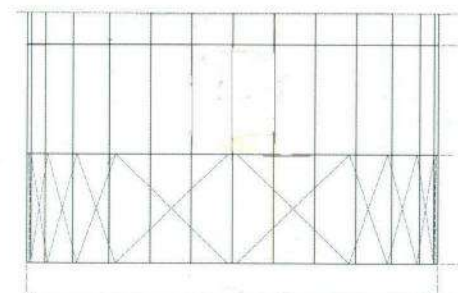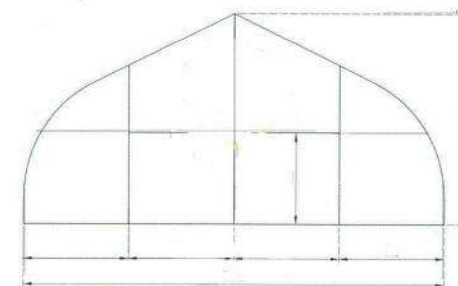

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005、6061/T6)
- 2) Main Profile:
201 x111x5/4mm
- 3) Eave connection:
Hot-dip galvanized steel insert.

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2,NFPA701
- 3) Weight of roof cover:800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

PVC Window Side walls,	Transparent PVC Cover
Lining & Curtain,	and Side Wall Cover,
Glass Door Units,	Floor System, Lighting,
Glass Wall System,	Weight Plate,Anchor and ect.
ABS Solid Wall System,	
Transparent PC Solid Wall,	



AKAA Trading LLC
Tents & Parking Shades



Halls/Big Structure Tent:

A-Shape Structure

a). Aluminium profile : 131*90*2.5mm

Frame Specifications:

- 1) Span Width: 10.00m, 12.00m
- 2) Eave Height: 4.00m
- 3) Ridge Height: 5.75m/6.08m
- 4) Roof Pitch: 20°
- 5) Bay spacing: 5.00m
- 6) Longest Component: 5.345m, 6.392m
- 7) Max. wind loading: 90km/h



Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005, 6061/T6)
- 2) Main Profile:
131 x90x3/2.5mm,
- 3) Eave connection:
Hot-dip galvanized steel twin plate.

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2, NFPA701
- 3) Weight of roof cover: 800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

PVC Window Side walls,
Lining & Curtain,
Glass Door Units,
Glass Wall System,
ABS Solid Wall System,
Transparent PC Solid Wall,





Polygon Structure Tent:

Decagon Structure

a). Aluminium profile : 254*110*4mm

Frame Specifications:

- 1) Span Width: 25.00m
- 2) Eave Height: 4.00m
- 3) Ridge Height: 8.05m
- 4) Roof Pitch: 18°
- 5) Bay spacing: 7.53m
- 6) Longest Component: 10.467m
- 7) Max. wind loading: 100km/h

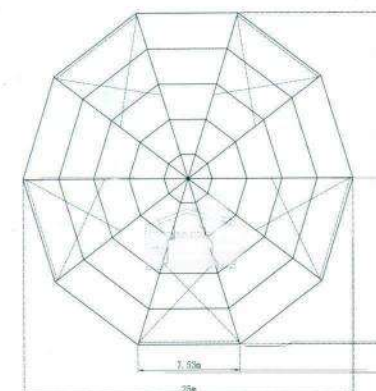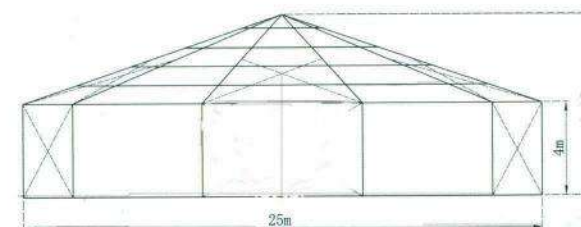

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005、6061/T6)
- 2) Main Profile:
254 x110x4mm,
- 3) Eave connection:
Hot-dip galvanized steel twin plate.

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2,NFPA701
- 3) Weight of roof cover: 800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

PVC Window Side walls,
Lining & Curtain,
Glass Door Units,
Glass Wall System,
ABS Solid Wall System,
Transparent PC Solid Wall,

Transparent PVC Cover
and Side Wall Cover,
Floor System, Lighting,
Weight Plate, Anchor and ect.





AKAA Trading LLC
Tents & Parking Shades

Pagoda Tent:

a). Aluminium profile: 100*48*3mm

Frame Specifications:

- 1) Span Width: 8.00m
- 2) Eave Height: 2.5m
- 3) Ridge Height: 6.45m
- 4) Roof Pitch: 20°
- 5) Bay spacing: 8.00m
- 6) Longest Component: 8.00m
- 7) Max. wind loading: 80km/h

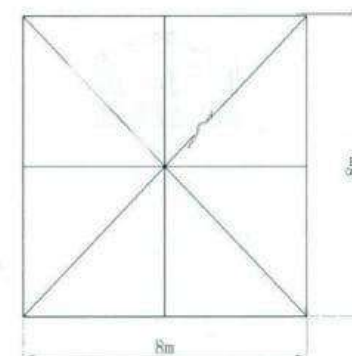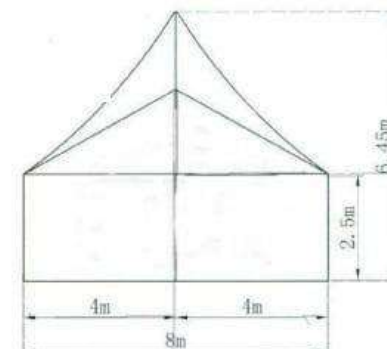

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005, 6061/T6)
- 2) Main Profile:
100 x48x3mm,
- 3) Eave connection:
Hot-dip galvanized steel insert.
- 4) High -peak: Tube Stand

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2, NFPA701
- 3) Weight of roof cover: 800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

- | | |
|----------------------------|-------------------------------|
| PVC Window Side walls, | Transparent PVC Cover |
| Lining & Curtain, | and Side Wall Cover, |
| Glass Door Units, | Floor System, Lighting, |
| Glass Wall System, | Weight Plate, Anchor and ect. |
| ABS Solid Wall System, | |
| Transparent PC Solid Wall, | |

Polygon Structure Tent:



a). Aluminium profile: 100*48*3mm



AKAA Trading LLC
Tents & Parking Shades

Frame Specifications:

- 1) Span Width: 8.00m
- 2) Eave Height: 2.5m
- 3) Ridge Height: 6.45m
- 4) Roof Pitch: 20°
- 5) Bay spacing: 8.00m
- 6) Longest Component: 8.00m
- 7) Max. wind loading: 80km/h

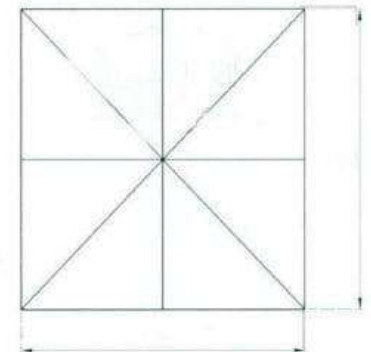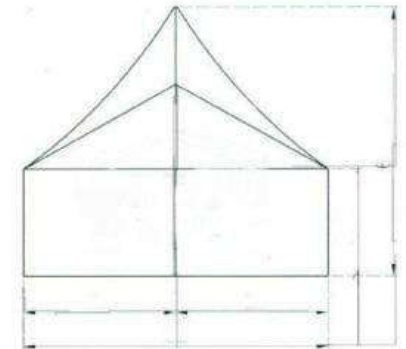

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005, 6061/T6)
- 2) Main Profile:
100 x48x3mm,
- 3) Eave connection:
Hot-dip galvanized steel insert.
- 4) High -peak: Tube Stand

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2, NFPA701
- 3) Weight of roof cover: 800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

PVC Window Side walls,	Transparent PVC Cover
Lining & Curtain,	and Side Wall Cover,
Glass Door Units,	Floor System, Lighting,
Glass Wall System,	Weight Plate, Anchor and ect.
ABS Solid Wall System,	
Transparent PC Solid Wall,	

Halls/Big Structure Tent:

A-Shape Tent




a). Aluminium profile : 300*124*8/5mm 350*124*10/6mm



AKAA Trading LLC
Tents & Parking Shades

Frame Specifications:

- 1) Span Width: 40.00m 50.00m 60.00m
- 2) Eave Height: 6.00m
- 3) Ridge Height: 12.30m 14.00m 15.90m
- 4) Roof Pitch: 18°
- 5) Bay spacing: 5.00m
- 6) Longest Component: 11.07m
- 7) Max. wind loading: 120km/h

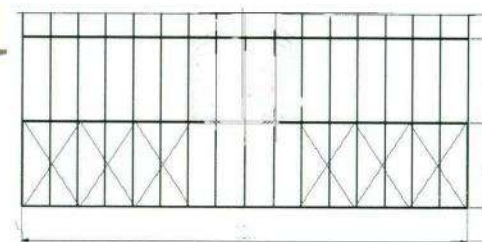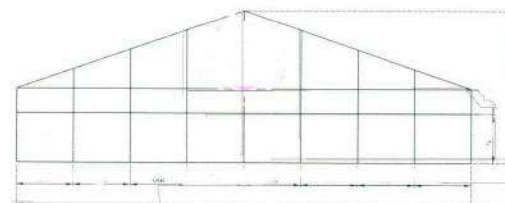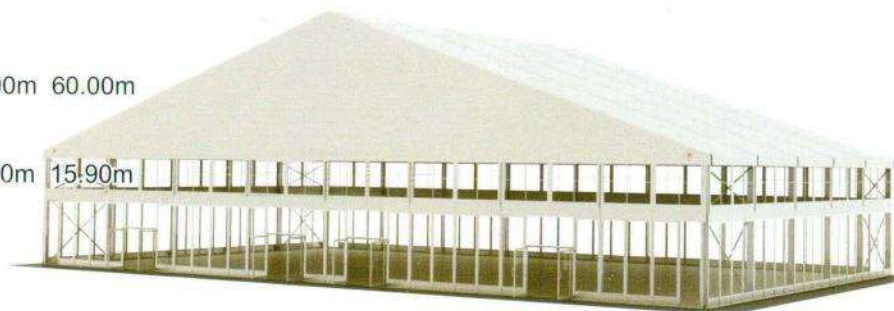

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005、6061/T6)
- 2) Main Profile:
300*124*8/5mm
350*124*10/6mm
- 3) Eave connection:
Hot-dip galvanized steel twin plate.

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2,NFPA701
- 3) Weight of roof cover: 800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

PVC Window Side walls,
Lining & Curtain,
Glass Door Units,
Glass Wall System,
ABS Solid Wall System,
Transparent PC Solid Wall,

Transparent PVC Cover
and Side Wall Cover,
Floor System, Lighting,
Weight Plate, Anchor and ect.



AKAA Trading LLC
Tents & Parking Shades



Polygon Structure Tent:

A-Shape Structure

a). Aluminium profile : 131*90*2.5mm

Frame Specifications:

- 1) Span Width: 10.00m, 12.00m
- 2) Eave Height: 4.00m
- 3) Ridge Height: 5.75m/6.08m
- 4) Roof Pitch: 20°
- 5) Bay spacing: 5.00m
- 6) Longest Component: 5.345m, 6.392m
- 7) Max. wind loading: 90km/h



Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005, 6061/T6)
- 2) Main Profile:
131 x90x3/2.5mm,
- 3) Eave connection:
Hot-dip galvanized steel twin plate.

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2, NFPA701
- 3) Weight of roof cover: 800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

PVC Window Side walls,
Lining & Curtain,
Glass Door Units,
Glass Wall System,
ABS Solid Wall System,
Transparent PC Solid Wall,



AKAA Trading LLC
Tents & Parking Shades

Pagoda Tent:



a) Aluminium profile: 85*48*3mm

Frame Specifications:

- 1) Span Width: 3.00m/4.00m/5.00m/6.00m
- 2) Eave Height: 2.5m
- 3) Ridge Height: 4.40m/5.00m/5.30m/5.60m
- 4) Roof Pitch: 20°
- 5) Bay spacing: 3.00m/4.00m/5.00m/6.00m
- 6) Longest Component: 3.00m/4.00m/5.00m/6.00m
- 7) Max. wind loading: 80km/h

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005, 6061/T6)
- 2) Main Profile:
85 x48x3mm,
- 3) Eave connection:
Hot-dip galvanized steel insert.
- 4) High-peak: Tube stand

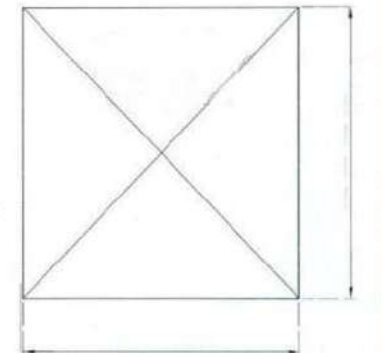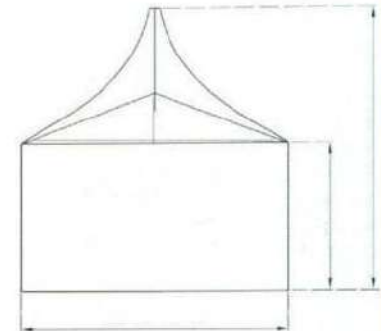

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2, NFPA701
- 3) Weight of roof cover: 800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter

Optional Accessories:

PVC Window Side walls,
Lining & Curtain,
Glass Door Units,
Glass Wall System,
ABS Solid Wall System,

Curved Roof & Floating Eave Tent



d). Aluminium profile : 201*111*4mm



AKAA Trading LLC
Tents & Parking Shades

Frame Specifications:

- 1) Span Width: 25.00m
- 2) Eave Height: 3.10m
- 3) Pole Height: 4.00m
- 4) Ridge Height: 7.78m
- 5) Roof Pitch: 18°
- 6) Bay spacing: 5.00m
- 7) Floating Eave Spacing: 2.6m
- 8) Longest Component: 9.75m
- 9) Max. wind loading: 100km/h

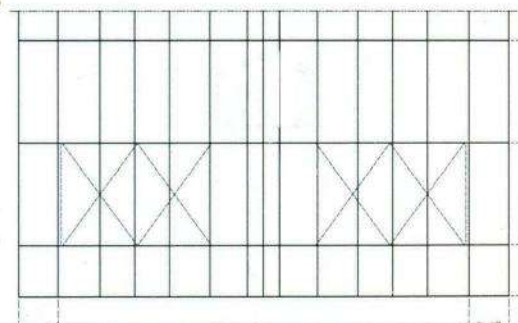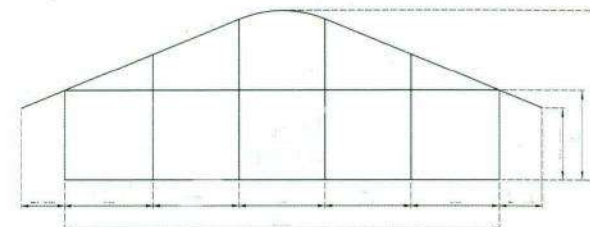

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005、6061/T6)
- 2) Main Profile:
201 x111x4mm
- 3) Eave connection:
Hot-dip galvanized steel twin plate
- 4) High-peak: Wirerope Stand

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2, NFPA701
- 3) Weight of roof cover: 800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

- | | |
|----------------------------|-------------------------------|
| PVC Window Side walls, | Transparent PVC Cover |
| Lining & Curtain, | and Side Wall Cover, |
| Glass Door Units, | Floor System, Lighting, |
| Glass Wall System, | Weight Plate, Anchor and ect. |
| ABS Solid Wall System, | |
| Transparent PC Solid Wall, | |



AKAA Trading LLC
Tents & Parking Shades



Over Eaves Structure Tent:

A-shape Over Eaves Structure Series

a). Aluminium profile : 168*90*4/3mm

Frame Specifications:

- 1) Span Width: 15.00m
- 2) Eave Height: 3.50m
- 3) Pole Height: 4.00m
- 4) Ridge Height: 6.54m
- 5) Roof Pitch: 18°
- 6) Bay spacing: 5.00m
- 7) Longest Component: 8.09m
- 8) Max. wind loading: 100km/h

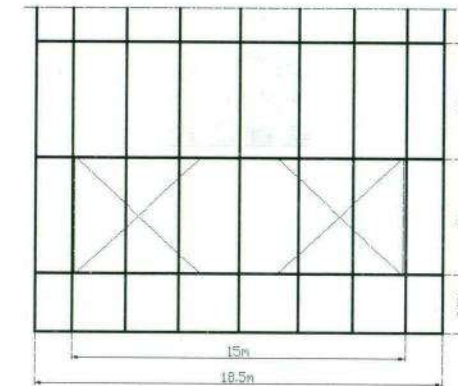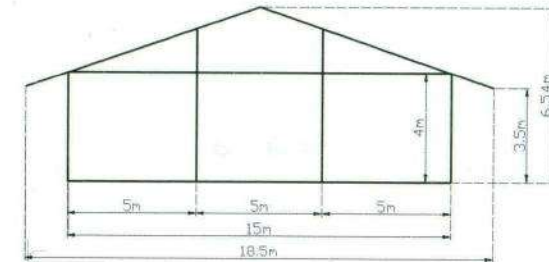

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005、6061/T6)
- 2) Main Profile:
168 x90x4/3mm
- 3) Eave connection:
Hot-dip galvanized steel twin plate.

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2,NFPA701
- 3) Weight of roof cover:800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

PVC Window Side walls,
Lining & Curtain,
Glass Door Units,
Glass Wall System,
ABS Solid Wall System,
Transparent PC Solid Wall,



Transparent PVC Cover
and Side Wall Cover,
Floor System, Lighting,
Weight Plate, Anchor and ect.

Pagoda Tent:

a). Aluminium profile: 100*48*3mm

Frame Specifications:

- 1) Span Width: 8.00m
- 2) Eave Height: 2.5m
- 3) Ridge Height: 6.45m
- 4) Roof Pitch: 20°
- 5) Bay spacing: 8.00m
- 6) Longest Component: 8.00m
- 7) Max. wind loading: 80km/h

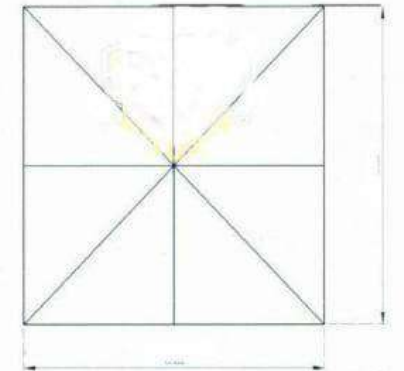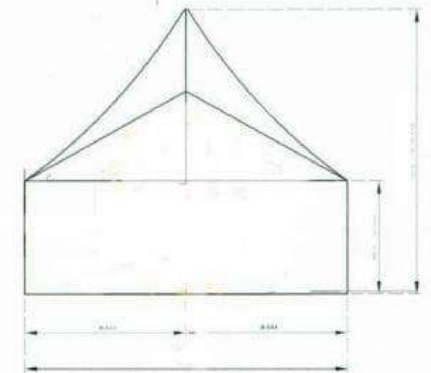

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005、6061/T6)
- 2) Main Profile:
100 x48x3mm,
- 3) Eave connection:
Hot-dip galvanized steel insert.
- 4) High -peak: Tube Stand

Cover Material:

- 1) White color, PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2,NFPA701
- 3) Weight of roof cover:800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Cover Material:

PVC Window Side walls,
Lining & Curtain,
Glass Door Units,
Glass Wall System,
ABS Solid Wall System,
Transparent PC Solid Wall,

Transparent PVC Cover
and Side Wall Cover,
Floor System, Lighting,
Weight Plate,Anchor and ect.

Party Tent:

A-Shape Structure Tent




a). Aluminium profile: 85*48*3mm



AKAA Trading LLC
Tents & Parking Shades

Frame Specifications:

- 1) Span Width: 3.00m, 4.00m
- 2) Eave Height: 2.70m / 3.00m / 3.50m,
2.70m / 3.00m / 3.50m
- 3) Ridge Height: 3.30m / 3.60m / 4.10m,
3.50m / 3.80m / 4.30m
- 4) Roof Pitch: 20°
- 5) Bay spacing: 3.00m
- 6) Longest Component: 2.70m, 3.67m
- 7) Max. wind loading: 80km/h

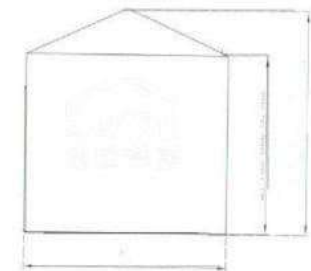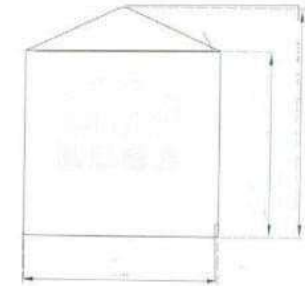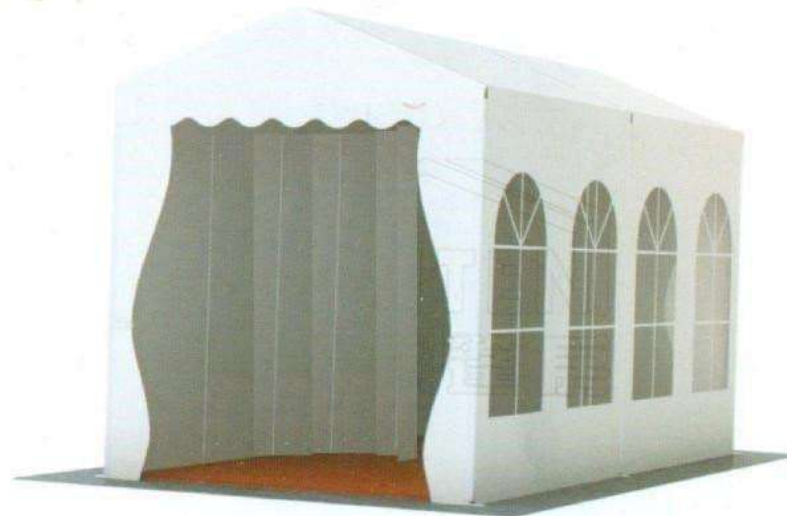

Frame Material:

- 1) Frame work Material:
Hard pressed extruded
aluminium F27
(6005, 6061/T6)
- 2) Main Profile:
85 x 48 x 3mm,
- 3) Eave connection:
Hot-dip galvanized steel insert.

Cover Material:


- 1) White color. PVC coated
- 2) Waterproof, anti-UV, flame retardant
according to DIN 4201, B1/M2, NFPA 701
- 3) Weight of roof cover: 800-950g/square meter
(opaque PVC)
- 4) Weight of side wall cover:
650g/square meter
(translucent PVC)

Optional Accessories:

PVC Window Side walls, Lining & Curtain, Glass Door Units, Glass Wall System, ABS Solid Wall System, Transparent PC Solid Wall,	Transparent PVC and Side Wall Cover, Floor System, Lighting, Weight Plate, Anchor;
--	---



AKAA Trading LLC
Tents & Parking Shades

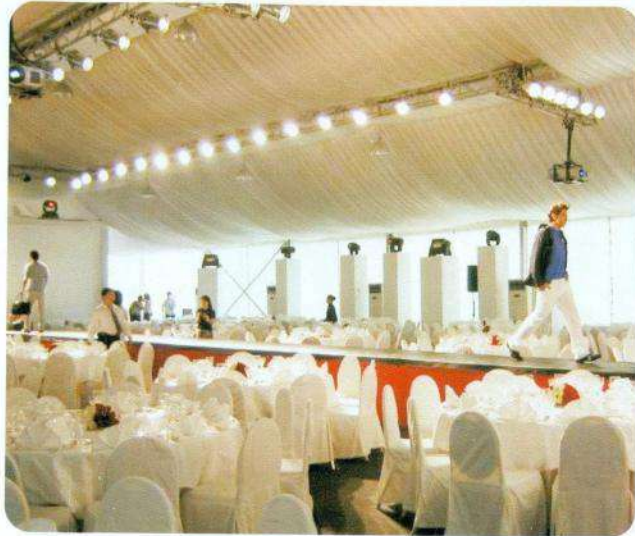



AKAA Trading LLC
Tents & Parking Shades

U.A.E Office:

Contact: 00971-06975093, 00971-5672001, 00971-65540401
Al Khaym Al Arabia Tents & Parking Shades LLC
Sharjha Al Soor Ibrahim Mohammad Al Modifa Street



U.A.E Office:

Contact: 00971-65385618, 00971-506975093
Al-Fakir Tent Trading L.L.C
Khazamia, Sharjha, U.A.E



Empire Marquees

The Marquee Manufacturing & Rental solutions

Pakistan Office:

Contact: 042-35786715, 0323-8888819
E-mail: empiremarquee@live.com
Address: Office # 1113, Floor 11, Eden Heights Building,
Jail Road Lahore Pakistan.